


1. After applying the adhesive, insert the base under each side of the tile.  
Depending on the size of the tile and the selected installation design, insert one or more bases on each side of the tile.  
In the case of large tiles and thin slabs, back-buttering is necessary (application of glue on substrate and back of tile) to ensure total coverage of the back of the tile, combined with perfect joining by tapping with a white rubber mallet on tiles, or using a specific tile vibrator on thin slabs.
  - 2 - Position the second row of tiles and level it using a white rubber mallet.
  - 3 - Insert the cone onto the base. Screw down the nut, applying the necessary force to level the tiles.
  - 4 - Once the adhesive has dried, to recover the reusable parts (cone and nut) the nuts should be unscrewed and removed together with the hoods, before breaking the bases.
- The bases can be removed using a white rubber mallet or your foot.  
The base must be struck in the same direction as the tile joint line.

Tile thickness: 3 - 12 mm (1/8" - 1/2")

Joint: 1.5 mm (1/16").

Wider joints are possible through the combined use of LITOLEVEL and spacers (+ T)

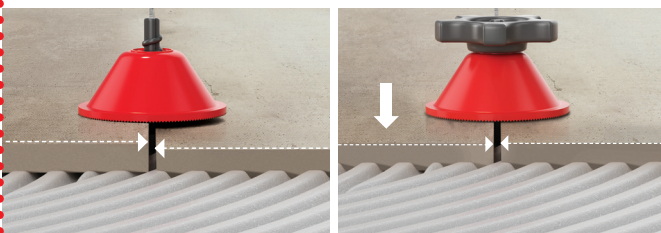


1-08.17

# LITOLEVEL



## Tile levelling spacers

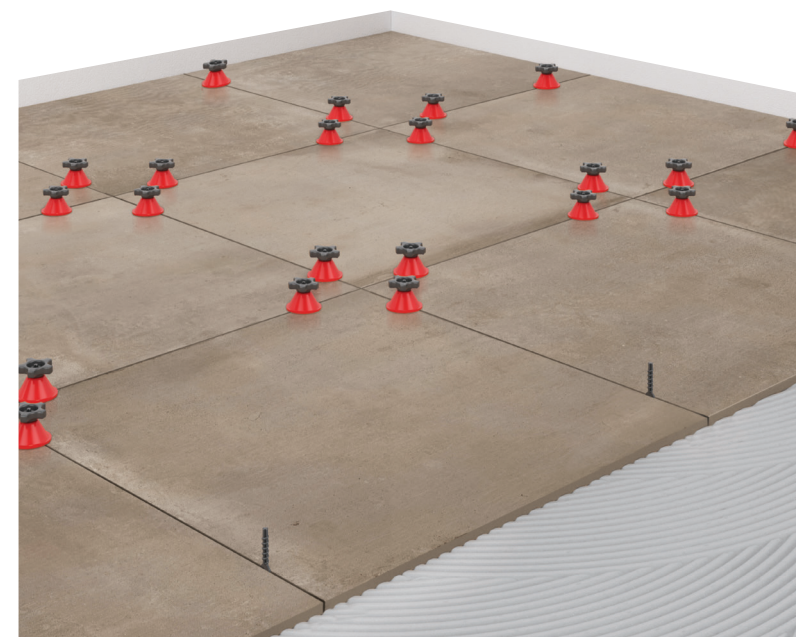

Litokol spa - via G. Falcone, 13/1  
42048 Rubiera (RE) - Italy  
Tel. +39.0522.622811 - Fax +39.0522.620150  
info@litokol.it - www.litokol.it

**LITOKOL**<sup>®</sup>  
HI-PERFORMANCE BUILDING PRODUCTS

**LITOKOL**<sup>®</sup>

LITOLEVEL guarantees simple and fast tile laying, eliminating lippage between tiles, thus ensuring perfectly level floors and coverings. LITOLEVEL is recommended for the laying of large porcelain stoneware, ceramic and natural stone tiles, as well as thin porcelain stoneware or agglomerate stone slabs (thickness 3/6mm).

The system is composed of 3 elements: base, cone and nut. It does not require the use of pliers or tools of any type.

### BASE

The bases are designed to level tiles with thickness from 3mm to 12mm (1/8" - 1/2"), creating narrow joints measuring 1.50 mm (1/16").

Wider joints are possible through the combined use of LITOLEVEL and cross or "T" tile spacers in the preferred size and in any case greater than 1.50 mm.



### CONE

The cone is practical and easy to insert.

It is made of rigid plastic, allowing efficient tile levelling. It is reusable and can be used hundreds of times.



### NUT

The nut is made of rigid plastic and has been designed for easy insertion into the base.

The nut too is reusable and can be used hundreds of times.



This system has been designed to apply pressure through the screwing of the nut onto the cone, which is free. The system is therefore able to efficiently level tiles without causing any twisting phenomena between tiles and without rubbing against the tile surface.


The nut produces vertical pressure on the cone, which is free, thus preventing any undesired horizontal movement of the tiles, which would otherwise create incorrect tile alignment and therefore inconsistent joint sizes.

The cone does not rub against the surface of the tiles, which would otherwise be stained or marked.


The system is able to level tiles gradually, increasing or decreasing the applied pressure by simply rotating the nut, thus allowing the installer the possibility to make any small adjustments that might be needed during installation.

This system also allows fast removal in the event joints need to be cleaned of any fresh glue, which in certain situations may fall between the tiles during laying. Immediately after the cleaning phase, the system can easily be reinserted to keep the tiles level until the glue has hardened.


* B																							
1	10	200																					
1	15	133	89																				
1	20	100	67	50																			
1	25	80	53	40	32																		
2	30	100	67	50	40	44																	
2	33	91	61	45	36	40	37																
2	40	75	50	38	30	33	30	25															
2	45	67	44	33	27	30	27	22	20														
2	50	60	40	30	24	27	24	20	18	16													
2	55	55	36	27	22	24	22	18	16	15	13												
2	60	50	33	25	20	22	20	17	15	13	12	11											
3	75	53	36	27	21	22	20	17	15	13	12	11	11										
3	80	50	33	25	20	21	19	16	14	13	11	10	10	9									
3	90	44	30	22	18	19	17	14	12	11	10	9	9	8	7								
3	100	40	27	20	16	17	15	13	11	10	9	8	8	7	6								
4	120	42	28	21	17	17	15	13	11	10	9	8	8	7	6	6	6						
5	150	40	27	20	16	16	14	12	10	9	8	8	7	7	6	5	5	4					
6	180	39	26	19	16	15	13	11	10	9	8	7	7	6	6	5	5	4	4				
7	200	40	27	20	16	15	14	11	10	9	8	8	7	6	6	5	5	4	4	4			
8	240	38	25	19	15	14	13	10	9	8	8	7	6	6	5	5	4	4	3	3	3		
10	300	37	24	18	15	13	12	10	9	8	7	7	6	5	5	4	4	3	3	3	3	2	
PZ	CM	10	15	20	25	30	33	40	45	50	55	60	75	80	90	100	120	150	180	200	240	300	A
↕	PZ	1	1	1	1	2	2	2	2	2	2	2	3	3	3	3	4	5	6	7	8	10	*



Tile	pcs/side	pcs/m²
60x60 cm	2	11




Tile	pcs/side A - B	pcs/m²
60x120 cm	2-4	8




Tile	pcs/side A - B	pcs/m²
60x120 cm	2-4	8



Tile	pcs/side A - B	pcs/m²
15x120 cm	1-4	28
20x120 cm	1-4	21



Tile	pcs/side A - B	pcs/m²
150x300 cm	5-10	3



\* pcs per side

